





## ME SERIES

Valco Melton's ME Double Effect Dispensing Gun Series introduces one of the most advanced technologies for high velocity intermittent bead applications to the hot melt gluing market. Thanks to its double effect module system, the ME Series ensures a perfect and uniform adhesive cut, giving a clean, quality appearance for stronger product finishing. The ME applicator offers a flexible and versatile design, adaptable to market standards, which permits a universal fit and easy configuration for all customers application demands.

- 100% compatible to market standards
- Up to 2,400 cycles per minute velocity application
- Single and multi-modular designs
- Easy, flexible configurability and location

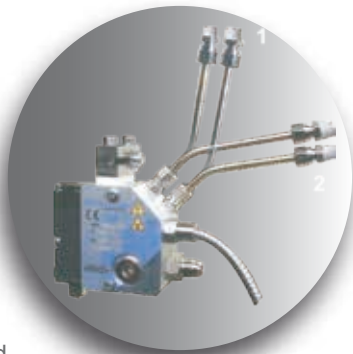


Vertical (1) and horizontal (2) positions for air inputs

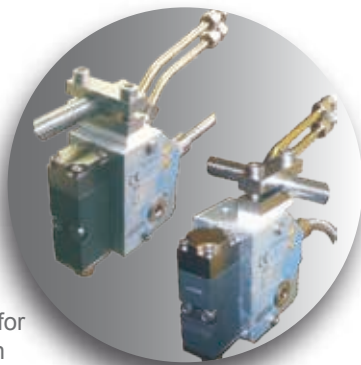

Two mounting bracket positions for easy configuration




Lateral adhesive input placed for maximum versatility




Standard and adaptable waterproof version

## ME Series Applications:

ME CVO



ME Multibead



### APPLICATION

ME Series Double Effect System Gun, providing the packaging industry with a better solution for hot melt applications.

Valco Melton's range of application products offer a complete selection of hot melt components and support:

- RTD hot melt hoses
- Manual and automatic dispensing valves
- Nozzle and applicator styles
- Mounting bracket packages
- Solid-state pattern control systems
- In-line filters
- Replacement parts for competitive systems
- High-performance hot melt adhesives

ISO 9001

QUALITY SYSTEMS

## Technical Specifications

| Specifications                    |                        |
|-----------------------------------|------------------------|
| Max. Operating Temperature        | 240°C / 464°F          |
| Max. Operating Hydraulic Pressure | 100 bar / 1450 psi     |
| Max. Operating Cycle Rate         | 2400 cycles per minute |
| Air Pressure                      | 4-6 bar/ 58-87 psi     |
| Electrical Consumption            | 190-250 VAC 50/60 Hz   |



For more information, visit [valcomelton.com](http://valcomelton.com) or contact your local Valco Melton representative.

World Headquarters: USA, Cincinnati, Ohio (Corporate Offices) • Tel:+1.513.874.6550 • Fax: +1.513.874.3612

Europe Headquarters: Spain, Navarra • Tel:+34.948.321.580 • Fax:+34.948.326.584

Asia Headquarters: China, Xiamen, Fujian • Tel:+86.592.591.7854 • Fax:+86.592.591.7834

info@valcomelton.com • Serving over 76 Countries Worldwide • valcomelton.com